



Air Saw

High powered for strong cutting. Designed to meet site demands. Equipped with easy-to-use features. Cuts FRP, aluminum, stainless steel, etc. Ideal for automobile repairs, cutting tire housings and side steps, trimming burrs, etc.

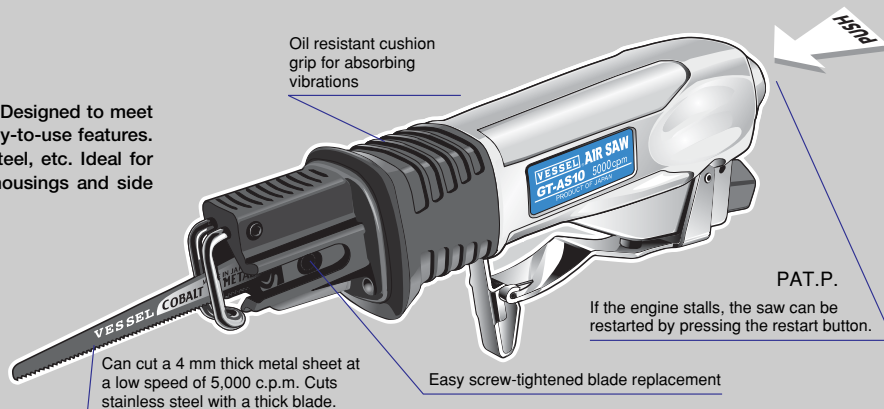

Air Belt Sander

Designed for fieldwork: easy-to-manage, simple belt replacement, etc. User workload is reduced to improve workability. Ideal for deburring aluminum die-cast and forged parts, sanding down automobile sheets and removing rust, solder splatter, etc.

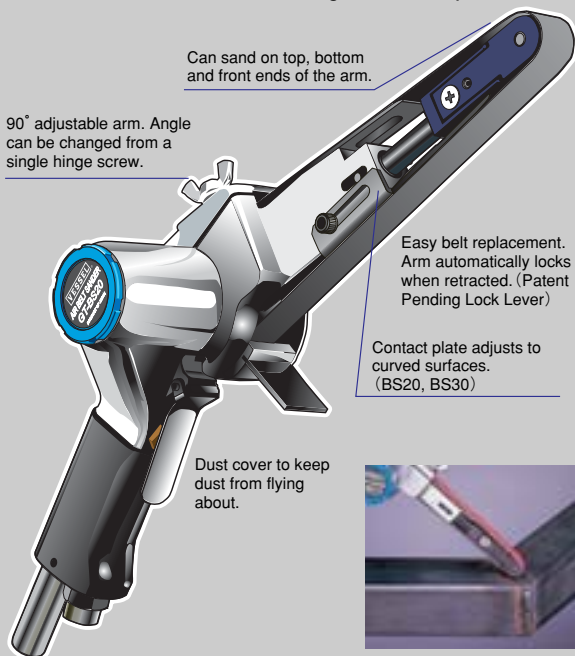

Air Disk Grinder


Handy, powerful grinder designed for safety and ease of use. Spindle lock for facilitating disk replacement. Ideal for grinding/polishing metal, base finishing, removing beads, burrs, rust and paint, cutting metal rods and thin panels, finish-polishing, etc.



Air Micro Grinder

High precision against run-out at high speed. Enables easy smooth grinding. Ideal for grinding and sculpting metal molds, surfacing castings and welded parts, deburring machined parts, finishing complicated curves, grinding linings, beveling gears, etc.


Small and lightweight. Does not retain heat. Easy to maintain.

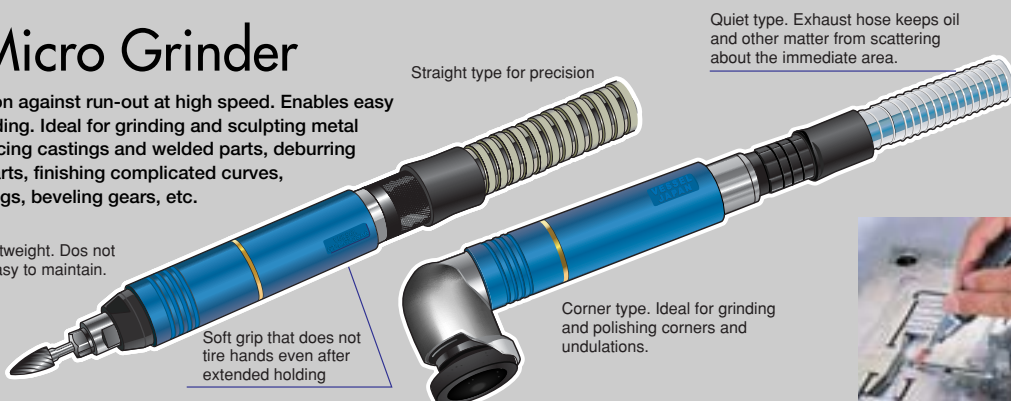




Air Disk Sander

Low 5,000 rpm speed ideal for sanding and polishing. High torque prevents stopping and heating even under load. Choose tool mounting between 6 mm collet and M10 disk nut. Both can be used with separately sold attachments.

Welding pre/after-processing...M10 disk nut system GT-DS50B

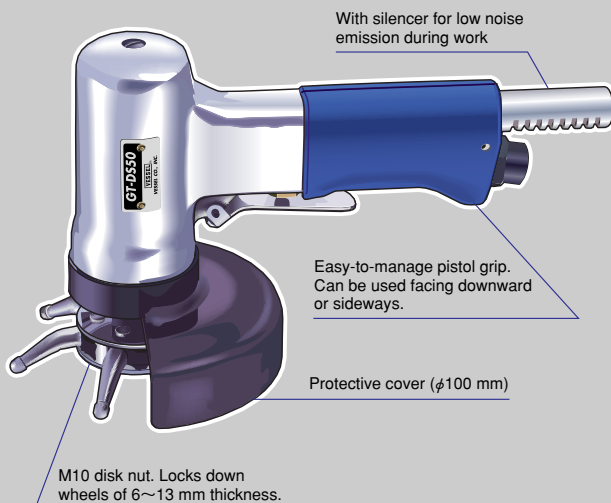


For deburring and polishing...φ6 mm collet chuck system GT-DS50A



Air Scraper

Use to detach IC chips from circuit boards when recycling PCs, faxes and copiers, or to scrape mortar and paint from external walls of structures. Short stroke pitch reduces jumping of the scraper attachment whereby making work more comfortable.

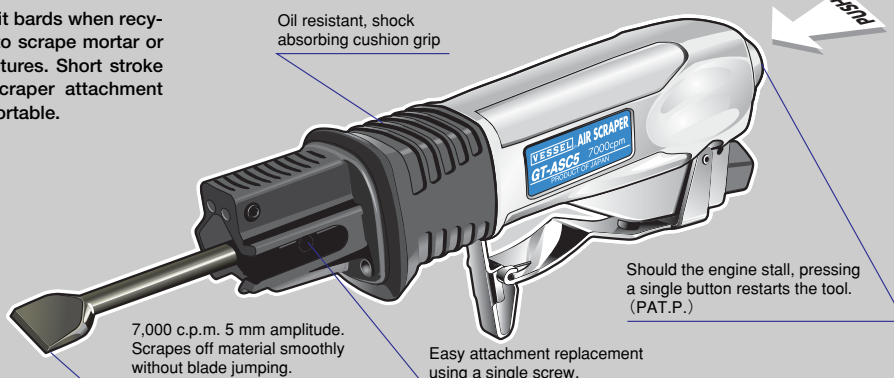

Air Micro Die Grinders


Air Micro Die Grinders

Capacity is listed as instant reference and depends on operation conditions.

Lightweight and Compact. Pen Holding Touch

For Precision Grinding


GT-MG75S



GT-MG55SR (Ergonomic grip)



GT-MG55S/MG55SB (Reverse turning type)



GT-MG25S



GT-MG55SAR (Soft grip)



GT-MG35SAR (Soft grip)



GT-MG35-12CC (Soft grip)



Flat Surface Grinding/Polishing

GT-MG25-12CF (Soft grip)



GT-MG25-9CF (Soft grip)



Accessories

Chuck handle · Lap ring #600 · Rubber holder
Oil · Headcup #80 · PO-ring #60 #100 #150 #240...3 pcs. each
#400 #600...1 pc. each



Corner attachments

GT-MG35-12CF (Precision grinding at 35,000 rpm)

GT-MG25-12CC (Precision grinding at 25,000 rpm)

Accessories

Chuck handle · Lap ring #600 · Rubber holder
Oil · Headcup #80 · PO-ring #60 #100 #150 #240...3 pcs. each
#400 #600...1 pc. each



Corner attachments

GT-MG25-9CC (Precision grinding at 25,000 rpm)

GT-MG35-9CC (Precision grinding at 35,000 rpm)

Model No.	No Load Speed rpm	Air Consumption m ³ /min	Hose Coupling	Air Hose Inner Dia. mm	Overall length mm	Frame Dia. mm	Weight g	Collet Chuck φ mm	
GT-MG75S	75,000	0.16	Rc 1/4	6.35	170	18.5	190	3	
GT-MG55S	55,000	0.16	Rc 1/4	6.35	163	17.5	180	3	
GT-MG55SB	55,000	0.16	Rc 1/4	6.35	163	17.5	180	3	
GT-MG55SR	55,000	0.16	Rc 1/4	6.35	180	20.0	220	3	
GT-MG55SAR	55,000	0.245	Rc 1/4	6.35	178	24.5	260	3	
GT-MG35SAR	35,000	0.285	Rc 1/4	6.35	182	29.5	435	6	
GT-MG25S	25,000	0.175	Rc 1/4	6.35	198	30.0	600	6	
GT-MG35-12CC	35,000	0.25	Rc 1/4	6.35	183	24.5	305	3	
GT-MG35-12CR	35,000	0.16	Rc 1/4	6.35	151	20.0	160	3	
GT-MG25-12CF	25,000	0.25	Rc 1/4	6.35	181	24.5	315		Tip tool installation part: M7
GT-MG25-9CF	25,000	0.25	Rc 1/4	6.35	173	24.5	310		Tip tool installation part: M7
GT-MG25-12CR	25,000	0.16	Rc 1/4	6.35	160	20.0	200		Tip tool installation part: M7
GT-MG25-9CR	25,000	0.16	Rc 1/4	6.35	143	20.0	200		Tip tool installation part: M7

·Working air pressure...0.6MPa

·Overall length...Accessories and exhaust hose parts not included.

·Weight...Accessories not included.

·With regard to GT-MG55S, MG55SR, MG75S and a 2.35 mm collet chuck is also prepared.

·In the main body, a 1.5m air intake hose, exhaust hose and a hose joint are attached.

OP ...Can be replaced by user. OP ...Factory attached.


CAUTION! Keep away from flying articles. Wear safety goggles and work with most care around.

Micro Air Grinder / Air Disk Grinders

Micro Air Grinder Tip Tools for Smooth Surface Grinding and Polishing (GT-MG25-12CF/9CF/12CR/9CR)

To meet work objectives from the removal of cutter marks in the manufacture of metal molding to the finishing of mirror surfaces.

Headcup




Model No.	Grit #	
HC-80	80	
Inner Ctn.	10 per carton	

Rubber Holder




Model No.		
RH-30		
Inner Ctn.	10 per carton	

PO-Ring




Model No.	Grit #	
PR-60	60	
PR-100	100	
PR-150	150	
PR-240	240	
PR-400	400	
PR-600	600	
Inner Ctn.	10 per carton	

Lap Ring



Model No.	Grit #	
LP-320	320	
LP-400	400	
LP-600	600	
LP-800	800	
LP-1000	1000	
Inner Ctn.	30 per carton	

Color identification

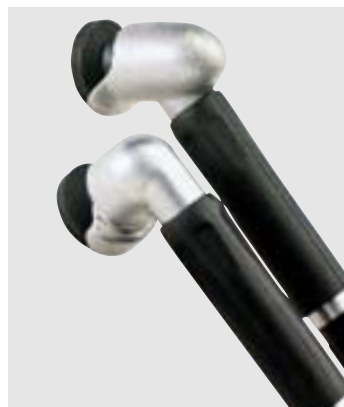

Air Disk Grinder

Handy and Powerful Grinding

Disk Dia. 100mm

GT-DG100



OP Bar grip (Auxiliary handle)

Accessories BPB-2 Quick lock adapter




Model No.	Grindstone size Outer dia. X Thickness X Hole dia. mm	Max. Circumferential Speed m/min	Working Air Pressure MPa	No Load Speed rpm	Air Consumption m ³ /min	Overall Length mm	Height mm	Weight g
GT-DG100	100×6×15	4,300	0.6	13,500	0.7	205	92	1,390

Air Disk Grinder Wheel (for GT-DG100)


Quick Lock Disk System...Disk can be easily replaced without fastening tools, by attaching a purpose-specific adapter. Ordinary grindstones (Hole diameter 15 X Thickness 3~6 mm) can be attached by detaching the adapter.

Paper wheel




Model No.	Grit #	Use
CL-P36	36Z	Roughing
Inner Ctn.	5 per carton	

Paper wheel




Model No.	Grit #	Use
CL-P60	60A	Grinding
CL-P80	80A	Grinding
Inner Ctn.	5 per carton	

Cutter wheel



Model No.	Grit #	Use
CL-CW	—	Cutting
Inner Ctn.	5 per carton	

Nylon wheel



Model No.	Grit #	Use
CL-NW	—	Rust removal
Inner Ctn.	5 per carton	



1 Quick Lock Adapter per box

Air Disk Sanders

Air Disk Sanders NEW

Low speed of 5000 rpm & High torque

Pad Dia. **50mm**

GT-DS50A

collet chuck
φ6mm

With noise reducer

Accessories

Flap wheel...#60...1 pc.
Fiber wheel...#600...1 pc.
Pitatto holder...1 pc.
Pitatto disk paper...#60...3 pcs

OP
Disk bolt
•Collet chuck
(φ3mm, φ1/4" and φ1/8")

Disk Dia. **100mm**

GT-DS50B

M10 disk nut

With noise reducer

Accessories

Protective cover
Disk nut
Pin wrench

Model No.	Disk Dia. mm	No Load Speed rpm	Air Consumption N l/min.	Air Hose Joint	Air Hose Inner Dia. mm	Overall Length mm	Weight g	Tip Tool Installation Part
GT-DS50A	Pad dia. 50	5,000	650	Rc 1/4	6.35	211	935	Collet chuck φ6 mm
GT-DS50B	Disk dia. 100	5,000	650	Rc 1/4	6.35	211	1,150	Disk nut M10



•Working air pressure...0.6 MPa

Air Disk Sander Wheels NEW

DS50A



Pitatto Disk Paper (**PD-P60**)

Pitatto Holder (**PD-P6**)



Flap Wheel (**FL-60/120**)

Fiber Wheel (**FB-400/600/1000**)



Model No.	Grit No.	Max. Circumferential Speed rpm	Material	Use	Quantity
PD-P60	Z60	20,000	Zirconia	Thin pressed plate deburring, surfacing, etc.	50
PD-P6	—	—	Rubber (Pad)	For Pitatto disk paper	1
FL-60	A60	20,000	Alumina	Deburring, spatter removal	5
FL-120	A120	20,000	Alumina	Cylinder lining polishing, surfacing, etc.	5
FB-400	400	10,000	Unwoven cloth	Dirt removal, cleaning prior to welding or plating, burn removal after welding, etc.	5
FB-600	600	10,000	Unwoven cloth		5
FB-1000	1000	10,000	Unwoven cloth		5



Wheels to Remove Rust/Stains

DS50B

Hammer Wheel (**HMW10**)

Brush Wheel (**BHW10**)

PAT.P.



Model No.	Max. Circumferential Speed rpm	Material	Use	Quantity
HMW10	5,000	Stainless steel	Slag and spatter removal after welding, etc.	1
BHW10	5,000	Abrasive grain nylon	Steel plate rust removal, aluminum cast finishing, etc.	1

Precoat Grit Wheel to remove surface for painting.


Tool for Precoat Sander

Attach to purpose-specific air sander or electric drill to use.

Mixed threadlike abrasive material inside of highly flexible nylon base, formed into a brush wheel. Beautifully sands surfaces in a short amount of time with only a little pressure applied.



PCG-600



Model No.	Shaft Dia.	Working Rotational Speed rpm	Comparative Sandpaper Grain	Use
PCG-600	φ6mm	1,000~6,000	#400~#500	Peeling lacquered topcoats, etc.



Air Belt Sanders

For Deburring Automotive Sheet and Cans

Belt Width **12/10mm**

GT-BS12



With noise reducer

Accessories BPB-2
Sand belt #60...2 pcs
#80...1 pc.

Belt Width **30mm**

GT-BS30 (Aluminum roller head)
GT-BS30W (Urethane roller head)



With noise reducer

Accessories BPB-2
Bar grip ...1 pc. Sand belt #60...2 pcs
#80...1 pc.

Belt Width **20mm**

GT-BS20 (Aluminum roller head)
GT-BS20W (Urethane roller head)



OP

Bar grip (Auxiliary handle)

With noise reducer

Accessories BPB-2
Sand belt #60...2 pcs
#80...1 pc.

Roller Heads



Aluminum
(GT-BS20/BS30)
For heavy-duty
sanding.



Urethane.
(GT-BS20W/30W)
For undulated and
curved surfaces.

Model No.	Applicable Belt Size	Belt Circumferential Speed m/min	Working Air Pressure MPa	No Load Speed rpm	Air Consumption m ³ /min	Air Hose Joint	Overall Length mm	Weight g
GT-BS12	12/10mm×330mm	1,100	0.6	17,000	0.52	Rc 1/4	311	840
GT-BS20 (W)	20mm×520mm	2,500	0.6	16,000	0.6	Rc 1/4	398	1,300
GT-BS30 (W)	30mm×540mm	2,040	0.6	13,000	0.72	Rc 1/4	374	1,930

Total length: When mounted with belt.

Ceramic Endless Belt (For GT-BS12)

Attach to air belt sander to use. Made with ceramic grain. High grinding power and long lasting.



Quantity: 50

Model No.	Size	Grit No.
CB12-60	12mm×330mm	# 60
CB12-80	12mm×330mm	# 80
CB12-120	12mm×330mm	# 120

Zirconia Endless Belt (For GT-BS20)

Attach to air belt sander to use. Tough abrasive grain produces a good sanding effect. Improves sanding performance.



Quantity: 20

Model No.	Size	Grit No.
ZB20-40	20mm×520mm	# 40
ZB20-60	20mm×520mm	# 60
ZB20-80	20mm×520mm	# 80

Zirconia Endless Belt (For GT-BS30)

Attach to air belt sander to use. Tough abrasive grain produces a good sanding effect. Improves sanding performance.



Quantity: 10

Model No.	Size	Grit No.
ZB30-40	30mm×540mm	# 40
ZB30-60	30mm×540mm	# 60
ZB30-80	30mm×540mm	# 80

Air Scraper

For Scraping Off Various Materials

GT-ASC5



With noise reducer
※ Scraper sold separately

Accessories



Model No.	Working Air Pressure MPa	Stroke Speed c.p.m.	Air Consumption m ³ /min	Stroke mm	Air Hose Joint	Overall Length mm	Weight g
GT-ASC5	0.6	7,000	0.28	5	Rc 1/4	195.5	810

Scrapers (For GT-ASC5)

ASC-25-8



ASC-50-8



Model No.	Blade Width	Shank Dia.	Use
ASC-25-8	25mm	φ 8mm	for IC chip
ASC-50-8	50mm	φ 8mm	for IC chip, out wall