




Industrial Air Riveting Nut Tool




Scale tag for pulling stroke

hydraulic oil cap bolt

Quick change connector for tie rod.


Precise powerful air motor; efficient for forward and reverse work.

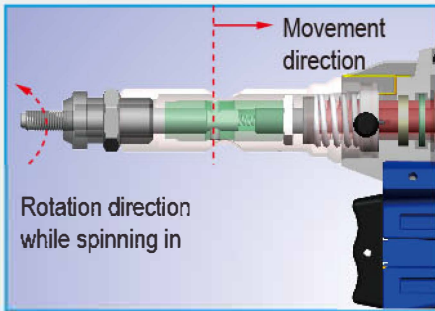

Rubber grip with soft touch for easy operation.

Trigger for pulling and spinning out.

Bi-directional 360° rotation air hose universal joint.

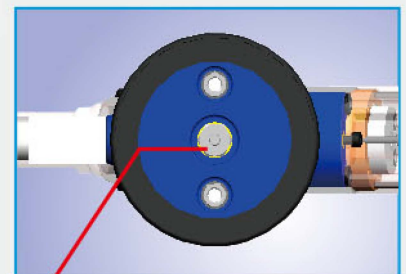

Safety valve, automatically release the pressure when the pressure is over the set 110 psi to protect from the operator and tool.



Industrial Air Riveting Nut Tool & Riveter



ST-6355 M3~M12
ST-6355A #6~1/2"
Air Riveting Nut Tool



ST-6356 M4~M12
ST-6356A #6~1/2"
Air Riveting Nut Tool



ST-6360M M3~M8
ST-6360S #6~5/16"
Air Riveting Nut Tool



ST-6361M M4~M12
ST-6361S #8~1/2"
Air Riveting Nut Tool



ST-6920 M4~M12
ST-6920A 1/4"~1/2", #8, #10
Air Spin-pull Rivet Nut Tool



Specification:

Recommend Air Pressure: 6.2 bar (90psi)

| Model No. | Riveting Capacity | Stroke Length | | Traction Power | | Air Consumption | | Weight | | Packing Pcs/Ctn/G.W./Cuft (kgs) |
|-----------|---|---------------|------|----------------|-------|-----------------|-------|--------|-----|---------------------------------|
| | | in | mm | lbs. | kgs | cfm | l/min | kgs | lbs | |
| ST-6355 | ■ M3, M4, M5, M6, M8, M10, M12 ■ #6-32, #8-32, #10-24, #10-32, 1/4"-20, 5/16"-18, 3/8"-16, 1/2"-13 | 0.276 | 7 | 4,800 | 2,176 | 16 | 450 | 2.45 | 5.9 | 5Pcs/Ctn/22/2.8' |
| ST-6356 | ■ M4, M5, M6, M8, M10, M12 ■ #6-32, #8-32, #10-24, #10-32, 1/4"-20, 5/16"-18, 3/8"-16, 1/2"-13 | 0.65 | 16.5 | 6,000 | 2,727 | 20 | 560 | 3.95 | 8.7 | 3Pcs/Ctn/22/3.3' |
| ST-6360M | ■ M3, M4, M5, M6, M8 | 0.28 | 7 | 3,200 | 1,452 | 16 | 450 | 2.1 | 4.6 | 5Pcs/Ctn/19/2.8' |
| ST-6360S | ■ #6-32, #8-32, #10-24, #10-32, 1/4"-20, 5/16"-18 | 0.28 | 7 | 3,200 | 1,452 | 16 | 450 | 2.1 | 4.6 | 5Pcs/Ctn/19/2.8' |
| ST-6361M | ■ M4, M5, M6, M8, M10, M12 | 0.28 | 7 | 6,000 | 2,724 | 16 | 450 | 2.1 | 4.6 | 5Pcs/Ctn/20.5/2.8' |
| ST-6361S | ■ #8-32, #10-24, #10-32, 1/4"-20, 5/16"-18, 3/8"-16, 1/2"-13 | 0.28 | 7 | 6,000 | 2,724 | 16 | 450 | 2.1 | 4.6 | 5Pcs/Ctn/20.5/2.8' |
| ST-6920 | ■ M4, M5, M6, M8, M10, M12(Round) | 0.276 | 7 | 6,800 | 3,100 | 16 | 450 | 3 | 6.6 | 4Pcs/Ctn/22.3/3.3' |
| ST-6920A | ■ 1/4"-20, 5/16"-18, 1/2"-13, #8-32, #10-24, #10-32 | 0.276 | 7 | 6,800 | 3,100 | 16 | 450 | 3 | 6.6 | 4Pcs/Ctn/22/3.5' |

* Material : ■ Aluminium+Steel+Stainless Steel+Structural blind rivet



Riveting Nut Tool & Advanced Lockbolt Tool



ST-6901

Air Riveting Nut Tool
(Handle exhaust)

ST-6902

Air Riveting Nut Tool
(Side exhaust)

ST-6340

Air Riveting Nut Tool
- With screw type nose head

ST-6341
ST-6343

Air Riveting Nut Tool
- With screw type nose head

ST-6341Q
ST-6343Q

Air Riveting Nut Tool
- With quick change head


*Please specify the Nosehead size when ordering.

*Standard only have one nose assembly, please indicate the size of pull set when ordering.




ST-6410 1/4" (6.4mm)
Traction Power: 4480 lbs
Air Hydraulic Lockbolt Tool
W/O Nose

ST-6411 1/4" (6.4mm)
Traction Power: 5600 lbs
Air Hydraulic Lockbolt Tool
W/O Nose



Magna-Grip



Original Huck Design
(C6L)



Option

Nose Head Assembly:
1/4" Huck C6L Nose
3/16" Huck C6L Nose
1/4" Huck Magna-grip Nose
3/16" Huck Magna-grip Nose



ST-6400 1/4" (6.4mm)
with 6400-NS03A
ST-6400-4.8 3/16" (4.8mm)
with 6400-NS04A
Air Hydraulic Lockbolt Tool

- **6400-NS05**
5/32", 3/16", 1/4"
Blind Rivet Nose Ass'y
- **6400-NS02**
3/16" Nose Ass'y
- **6400-NS01A**
1/4" Nose Ass'y
- **6400-NS03A**
1/4" Huck Lockbolt
Nose Ass'y
- **6400-NS04A**
3/16" Huck Lockbolt
Nose Ass'y
- Option: Apply for Huck C6L Fastener / AVDEL Avdelok
- Standard: Apply for Huck Magna-Grip / AVDEL Maxiok

| Model No. | Hydraulic Lockbolt Tool W/Nose | Riveting Capacity | |
|-------------|-----------------------------------|-------------------|-----|
| | | in | mm |
| ST-6410H-01 | HUCK C6L NOSE | 1/4 | 6.4 |
| ST-6410H-02 | HUCK C6L NOSE | 3/16 | 4.8 |
| ST-6410H-03 | HUCK MAGNA-GRIP NOSE | 1/4 | 6.4 |
| ST-6410H-04 | HUCK MAGNA-GRIP NOSE | 3/16 | 4.8 |
| ST-6411H-01 | HUCK C6L NOSE | 1/4 | 6.4 |
| ST-6411H-02 | HUCK C6L NOSE | 3/16 | 4.8 |
| ST-6411H-03 | HUCK MAGNA-GRIP NOSE | 1/4 | 6.4 |
| ST-6411H-04 | HUCK MAGNA-GRIP NOSE | 3/16 | 4.8 |

Specification:

Recommend Air Pressure: 6.2 bar (90psi)

| Model No. | Nose | Nose | Free Speed (r.p.m) | Air Consumption | | Overall Length | | Air Inlet (N.P.T) | Net Weight | | Packing Pcs/Ctn/G.W./Cuft (kgs) |
|-----------|--|------------------------------|-----------------------|-----------------|-------|----------------|-----|----------------------|------------|------|---------------------------------------|
| | | | | cfm | l/min | inch | mm | | lb | kg | |
| ST-6901 | 1/4", 3/16", 5/32" M3, M4, M5, M6 | 3/16", M3, M4, M5 | 700 | 8 | 226 | 7.87 | 200 | 1/4" | 2.65 | 1.2 | 10Pcs/Ctn/14/1.0' |
| ST-6902 | 1/4", 5/16", 3/8", M5, M6, M8, M10 | 1/4", 5/16", M6, M8 | 450 | 8 | 226 | 8.27 | 210 | 1/4" | 3.97 | 1.8 | 5Pcs/Ctn/17/1.0' |
| ST-6340 | M10, M12, 3/8"-16, 3/8"-24, 1/2"-13 | M10, 3/8"-16, 3/8"-24 | 200 | 8 | 226 | 8.66 | 220 | 1/4" | 2.87 | 1.3 | 10pcs/CTN/15.5/1.15' |
| ST-6341 | M6, M8, M10, 1/4"-20, 5/16"-18, 3/8"-16 | M5, M6, 1/4"-20 | 360 | 8 | 226 | 8.46 | 215 | 1/4" | 2.76 | 1.25 | 10pcs/CTN/14.5/1.15' |
| ST-6341Q | M6, M8, M10, 1/4"-20, 5/16"-18, 3/8"-16 | M5, M6, 1/4"-20 | 360 | 8 | 226 | 8.46 | 215 | 1/4" | 2.76 | 1.25 | 10pcs/CTN/14.5/1.15' |
| ST-6343 | M3, M4, M5, #6-32, #8-32, #10-24, #10-32 ■ M6, 1/4"-20 | M3, M4, #6-32, #8-32, #10-24 | 1200 | 8 | 226 | 7.28 | 185 | 1/4" | 2.09 | 0.95 | 10pcs/CTN/12.5/0.85' |
| ST-6343Q | M3, M4, M5, #6-32, #8-32, #10-24, #10-32 ■ M6, 1/4"-20 | M3, M4, #6-32, #8-32, #10-24 | 1200 | 8 | 226 | 7.28 | 185 | 1/4" | 2.09 | 0.95 | 10pcs/CTN/12.5/0.85' |

All tools are available in both aluminum threaded insert and steel threaded insert.

■ Only available in aluminum threaded insert.

| Model No. | Riveting Capacity inch(mm) | Stroke Length | | Traction Power | | Air Consumption | | Weight | | Packing Pcs/Ctn/G.W./Cuft (kgs) |
|-------------|---|---------------|------|----------------|-------|-----------------|-------|--------|------|---------------------------------------|
| | | in | mm | lbs. | kgs | cfm | l/min | kgs | lbs | |
| ST-6410 | HUCK C6L MAGNA-GRIP 1/4"(6.4mm), 3/16"(4.8mm) | 0.94 | 24 | 4,480 | 2,033 | 9 | 255 | 1.74 | 3.84 | 6Pcs/Ctn/10.5/3.36' |
| ST-6411 | HUCK C6L MAGNA-GRIP 1/4"(6.4mm), 3/16"(4.8mm) | 0.78 | 19.5 | 5,600 | 2,539 | 9 | 255 | 1.81 | 3.99 | 6Pcs/Ctn/11/3.35' |
| ST-6400 | 1/4"(6.4mm) | 7/8 | 23 | 5,500 | 2,500 | 9 | 255 | 3.5 | 6.5 | 5Pcs/Ctn/24.4/3.97' |
| ST-6400-4.8 | 3/16"(4.8mm) | 7/8 | 23 | 5,500 | 2,500 | 9 | 255 | 3.5 | 6.5 | 5Pcs/Ctn/24.4/3.97' |



Industrial Air Riveter



ST-6240V Vacuum type
1/4"(6.4mm)
Air Hydraulic Riveter **Industrial**



ST-6250V Vacuum type
5/16"(7.8mm)
Air Hydraulic Riveter **Industrial**



ST-66198V Vacuum type
1/4"(6.4mm)
Air Hydraulic Riveter **Industrial**



ST-66199V Vacuum type
5/16"(7.8mm)
Air Hydraulic Riveter **Industrial**



ST-66155V Vacuum type
3/16"(4.8mm)
Air Hydraulic Riveter **Industrial**



ST-66192V Vacuum type
1/4"(6.4mm)
Air Hydraulic Riveter **Industrial**

Specification:

Recommend Air Pressure: 6.2 bar (90psi)

| Model No. | Riveting Capacity | Stroke Length | | Traction Power | | Air consumption | | Weight | | Packing Pcs/Ctn/G.W./Cuft (kgs) |
|------------------|---|---------------|------|----------------|-------|-----------------|-------|--------|------|---------------------------------|
| | | in | mm | lbs | kgs | cfm | l/min | kgs | lbs | |
| ST-6240V | 3/16"(4.8), 7/32"(5.6), 1/4"(6.4) | 1.02 | 26 | 4,000 | 1,816 | 9 | 255 | 1.94 | 4.28 | 6Pcs/Ctn/20.5/3.4' |
| ST-6250V | 3/16"(4.8), 7/32"(5.6), 1/4"(6.4), 5/16"(7.8) | 1.02 | 26 | 5,000 | 2,270 | 9 | 255 | 2.18 | 4.81 | 6Pcs/Ctn/21/4.6' |
| ST-66198V | 3/16"(4.8), 7/32"(5.6), 1/4"(6.4) structural monobolt rivets, "T" rivets and standard rivets-in all materials | 0.98 | 25 | 3,800 | 1,723 | 9 | 255 | 2.0 | 4.4 | 6Pcs/Ctn/18.06/5' |
| ST-66199V | 3/16"(4.8), 7/32"(5.6), 1/4"(6.4), 5/16"(7.8) structural monobolt rivets, "T" rivets and standard rivets-in all materials | 0.98 | 25 | 4,500 | 2,040 | 9 | 255 | 2.1 | 4.6 | 6Pcs/Ctn/19.2/5' |
| ST-66155V | Standard blind rivet 3/16"(4.8), 5/32"(4.0), Blind rivet magnalock/monobolt/orlock 1/8"(3.2), 3/32"(2.4) | 0.768 | 19.5 | 2,400 | 1,088 | 9 | 255 | 1.87 | 4.1 | 5Pcs/Ctn/16.5/2.4' |
| ST-66192V | Standard blind rivet 1/4"(6.4), 7/32"(5.6), Blind rivet magnalock/monobolt/orlock 3/16"(4.8) | 0.59 | 15 | 3,740 | 1,695 | 9 | 255 | 1.95 | 4.3 | 5Pcs/Ctn/16.8/2.5' |

* Material: ■ Aluminum+Steel+Stainless Steel+Structural blind rivets



Industrial Air Hydraulic Riveter

By pulling different size of rivet only nosepiece need to be replaced.
No other parts need to be changed.



ST-66164V Vacuum
ST-66164N Non-Vacuum
3/16" Air Hydraulic Riveter

ST-6220V Vacuum
5/32" (4.0mm)
Air Hydraulic Riveter **NEW**



ST-66165V Vacuum
ST-66165N Non-Vacuum
3/16"(4.8mm) Air Hydraulic Riveter



ST-66166V Vacuum
ST-66166N Non-Vacuum
1/4"(6.4mm) Air Hydraulic Riveter



ST-66167V Vacuum
ST-66167N Non-Vacuum
5/16"(7.8mm) Air Hydraulic Riveter



ST-6671 Non-Vacuum
3/16"(4.8mm)
Air Hydraulic Riveter



ST-6674 Non-Vacuum
1/4"(6.4mm)
Air Hydraulic Riveter



ST-6675 Vacuum Type
3/16"(4.8mm)
Air Hydraulic Riveter



ST-6676 Non-Vacuum
1/4"(6.4mm) Full Range
Air Hydraulic Riveter



ST-6677 Vacuum Type
1/4"(6.4mm)
Air Hydraulic Riveter

Specification:

Recommend Air Pressure: 6.2 bar (90psi)

| Model No. | Riveting Capacity inch (mm) | Traction Power | | Stroke Length | | Overall Height | | Air consumption | | Jaw | Weight | | Packing Pcs/Ctn/G.W./Cuft (kgs) |
|-----------|---|----------------|-------|---------------|-------|----------------|-----|-----------------|-------|-----|--------|------|---------------------------------------|
| | | lbs | kgs | in | mm | in | mm | cfm | l/min | | lbs | kgs | |
| ST-6220V | 5/64"(2.0), 3/32"(2.4), 1/8"(3.2), 5/32"(4.0) | 1,150 | 522 | 0.7 | 17.78 | 9-1/4 | 235 | 9 | 255 | 2 | 2.9 | 1.15 | 10Pcs/Ctn/15 /2.5' |
| ST-66164V | 3/32"(2.4), 1/8"(3.2), 5/32"(4.0), 3/16"(4.8) | 2,000 | 908 | 0.59 | 15 | 9-3/4 | 250 | 9 | 255 | 3 | 3.2 | 1.45 | 10Pcs/Ctn/18.06 /5' |
| ST-66164N | | 2,000 | 908 | 0.59 | 15 | 9-3/4 | 250 | 9 | 255 | 3 | 3.1 | 1.39 | |
| ST-66165V | 3/32"(2.4), 1/8"(3.2), 5/32"(4.0), 3/16"(4.8) | 2,000 | 908 | 0.93 | 23.5 | 10-1/2 | 270 | 9 | 255 | 3 | 3.3 | 1.49 | 6Pcs/Ctn/19.2 /5' |
| ST-66165N | | 2,000 | 908 | 0.93 | 23.5 | 10-1/2 | 270 | 9 | 255 | 3 | 3.2 | 1.46 | |
| ST-66166V | 3/16"(4.8), 7/32"(5.6), 1/4"(6.4) | 3,100 | 1,407 | 1 | 26 | 12-1/4 | 310 | 9 | 255 | 3 | 4.1 | 1.86 | 10Pcs/Ctn/21/3.3' |
| ST-66166N | | 3,100 | 1,407 | 1 | 26 | 12-1/4 | 310 | 9 | 255 | 3 | 3.9 | 1.77 | |
| ST-66167V | 3/16"(4.8), 7/32"(5.6), 1/4"(6.4), 5/16"(7.8) | 3,800 | 1,723 | 0.88 | 22.5 | 12-1/4 | 310 | 9 | 255 | 3 | 4.1 | 1.84 | 8Pcs/Ctn/24.5/4' |
| ST-66167N | | 3,800 | 1,723 | 0.88 | 22.5 | 12-1/4 | 310 | 9 | 255 | 3 | 3.8 | 1.74 | |
| ST-6671 | 3/32"(2.4), 1/8"(3.2), 5/32"(4.0), 3/16"(4.8) | 2,300 | 1,000 | 5/8 | 16 | 11-5/16 | 287 | 9 | 255 | 3 | 4.0 | 1.8 | 6Pcs/Ctn/17.5/2.5' |
| ST-6674 | 1/8"(3.2), 5/32"(4.0), 3/16"(4.8), 1/4"(6.4) | 2,500 | 1,140 | 5/8 | 16 | 11-3/8 | 280 | 9 | 255 | 3 | 4.0 | 1.8 | 6Pcs/Ctn/17/2.5' |
| ST-6675 | 3/32"(2.4), 1/8"(3.2), 5/32"(4.0), 3/16"(4.8) | 2,300 | 1,100 | 5/8 | 16 | 11-5/16 | 287 | 9 | 255 | 3 | 4.0 | 1.8 | 10Pcs/Ctn/25/2.2' |
| ST-6676 | 1/8"(3.2), 5/32"(4.0), 3/16"(4.8), 1/4"(6.4) | 3,800 | 1,700 | 7/8 | 23 | 12-1/2 | 317 | 9 | 255 | 3 | 5.0 | 2.3 | 6Pcs/Ctn/24/3.2' |
| ST-6677 | 1/8"(3.2), 5/32"(4.0), 3/16"(4.8), 1/4"(6.4) | 3,800 | 1,700 | 7/8 | 23 | 12-1/2 | 317 | 9 | 255 | 3 | 5.2 | 2.4 | 6Pcs/Ctn/23.5/3.2' |

* Material : ■ Aluminium+Steel blind rivets
■ Aluminium+Steel+Stainless Steel+Structural blind rivets



Air Hydraulic Riveter



ST-6616 3/16"(4.8mm)
Air Hydraulic Riveter



ST-6617 1/4"(6.4mm)
Air Hydraulic Riveter



ST-6618 9/32"(7.0mm)
Air Hydraulic Riveter



ST-6615 3/16"(4.8mm)
Air Hydraulic Riveter




ST-66154
1/4"(6.4mm) Air Hydraulic
Riveter (Vacuum Type)

ST-6615K

3/16"(4.8mm) Air Hydraulic Riveter Kit

Contents:

- | | |
|------------------------|---------------------------|
| 1-Joint Nut | 1-Safety Cap |
| 1-Air Hose Joint 1/4" | 1-Frame Cap Nut |
| 1-Air Hose Joint 5/16" | 1-Spanner Gauge |
| 1-Oil Pot | 1-Spanner |
| 10-Rivet 3/16" | 1-Nosepiece 4.8mm (3/16") |
| 10-Rivet 1/8" | 2-Nosepiece 4.0mm (5/32") |
| 10-Rivet 3/32" | 2-Nosepiece 3.2mm (1/8") |
| 10-Rivet 5/32" | 2-Nosepiece 2.4mm (3/32") |
| 1-Jaw Case | 5-Frame O-Ring(P12) |
| 1-Jaw Case Joint | 2-Frame Back Up Ring |
| 1-Jaw (Set) | 1-Oil Piston O-Ring |
| 1-Jaw Pusher | 1-Oil Piston Back Up Ring |
| 1-Jaw Pusher Spring | 1-Valve Pusher O-Ring |
| 1-Valve Pusher Spring | 1-Valve |
| 1-Return Spring A | 1-Air Piston Ring |
| 1-Return Spring B | 1-Blow case |

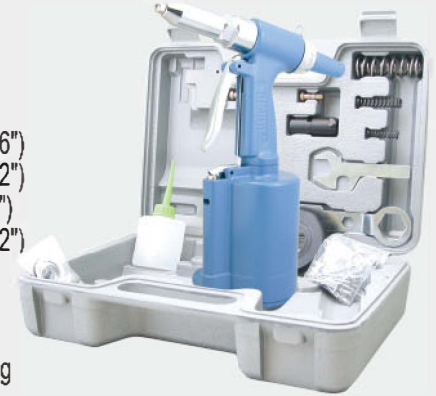

ST-66154K

- 1/4"(6.4mm) Air Hydraulic
1pc each 1/8", 5/32", 3/16", 3/32"
1/4" Nose Piece, Collection Bottle,
Jaw Pusher(3/16")
2- Multi-Wrench
1 - Deflector



Specification:

Recommend Air Pressure: 6.2 bar (90psi)

| Model No. | Blind Rivet Setting Capacity inch(mm) | Traction Power | | Stroke Length | | Overall Height | | Air Inlet (PT) | Air Hose (ID) | Jaw | Net Weight | | Packing Pcs/Ctn/G.W./Cuft (kgs) |
|-----------|--|----------------|-------|---------------|----|----------------|-----|----------------|---------------|-----|------------|-----|---------------------------------|
| | | lbs | kgs | in | mm | in | mm | | | | kgs | lbs | |
| ST-6616 | 1/8"(3.2), 5/32"(4.0) 3/16"(4.8) | 1,985 | 900 | 11/16 | 17 | 11-3/4 | 300 | 1/4" | 3/8" | 3 | 1.5 | 3.3 | 10Pcs/Ctn/22/3.34' |
| ST-6617 | 5/32"(4.0), 3/16"(4.8) 1/4"(6.3) | 3,300 | 1,500 | 11/16 | 17 | 12-1/2 | 320 | 1/4" | 3/8" | 3 | 2.4 | 5.3 | 6Pcs/Ctn/25/4.13' |
| ST-6618 | 5/32"(4.0), 3/16"(4.8), 1/4"(6.3) 9/32"(7.0) | 5,500 | 2,500 | 7/8 | 23 | 15-3/4 | 400 | 1/4" | 3/8" | 3 | 3.6 | 8.0 | 6Pcs/Ctn/25.5/3.74' |
| ST-6615 | 3/32"(2.4), 1/8"(3.2), 5/32"(4.0) 3/16"(4.8) | 1,586 | 720 | 9/16 | 14 | 10-3/4 | 273 | 1/4" | 3/8" | 2 | 1.5 | 3.3 | 10Pcs/Ctn/19/1.8' |
| ST-66154 | 3/16"(4.8) 1/4"(6.4) Optional 3/22"(2.4), 1/8"(3.2), 5/32"(4.0) | 2,248 | 1,022 | 11/16 | 17 | 10-9/16 | 269 | 1/4" | 3/8" | 2 | 1.95 | 4.3 | 8Pcs/Ctn/20.3/3.86' |

* Material : ■ Aluminium+Steel blind rivets

■ Aluminium+Steel+Stainless Steel+Structural blind rivets